

# TOWNSHIP OF NEW BRITAIN

Bucks County, Pennsylvania  
Founded: 1723

BOARD OF SUPERVISORS

Eileen M. Bradley  
Township Manager

Helen B. Haun  
John A. Bodden, Sr.  
William B. Jones, III  
A. James Scanzillo  
Gregory T. Hood

## SIDEWALK PERMIT APPLICATION

Office Use Only

Date Received: \_\_\_\_\_ Date Issued: \_\_\_\_\_  
(Township Official's Initials)

### Important Applicant To Complete All Items

#### Identification

1. Proposed Work At: \_\_\_\_\_ Lot# \_\_\_\_\_  
(Streets and Street Name) (If development, give Lot #)

2. Tax Parcel Number: \_\_\_\_\_

3. Name of Applicant: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_

Phone (H): \_\_\_\_\_ Phone (W): \_\_\_\_\_

4. Name of Owner: \_\_\_\_\_

Mailing Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_

Phone (H): \_\_\_\_\_ Phone (W): \_\_\_\_\_

5. Name of Contractor: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_

Phone: \_\_\_\_\_ Other Phone: \_\_\_\_\_

#### Road Open Information

New Sidewalk     Repair     OTHER: \_\_\_\_\_

\*\*\*Please continue on the reverse side\*\*\*

DESCRIPTION OF WORK: (if more space is needed, attach additional sheets)


The applicant shall submit a general description of the proposed work and a list of materials for construction.

INSURANCE REQUIRED: All applicants must complete the attached insurance addendum for Workman's Compensation and provide proof of General Liability Insurance Prior to the issuance of any permit.

ROAD REPAIRS: If the work performed under this permit results in damage to any township roads or other township facilities, the Applicant shall immediately notify its insurance carrier. Applicant shall be responsible for all such damages and shall commence repairs within 10 days of notice from the Township.

PLOT PLAN: The applicant shall clearly identify the location of the construction. Also, a sketch indicating width and type of surface must be submitted with this application. ALL NEW DRIVEWAYS MUST BE PAVED AT LEAST FROM THE EXISTING ROAD TO THE R.O.W. LINE.

Plot Plan  
For Applicants Use

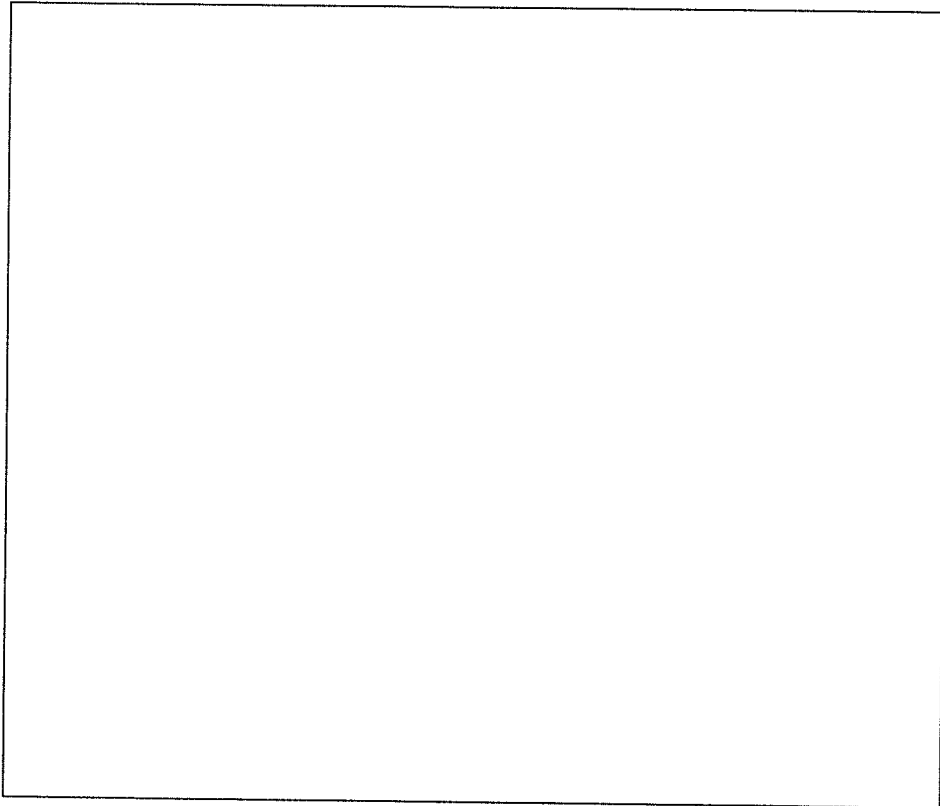

I hereby certify that the proposed work is authorized by the owner of record, and that I have be authorized by the owner to make this application as his/her authorized agent and that we agree to comply with all Township requirements for the above referenced work and understand that this is an application only, and that no work may begin until the actual permit for work issued by the Township.

Signature of Applicant: \_\_\_\_\_ Date: \_\_\_\_\_

# New Britain Township Concrete Checklist for Sidewal, Curb, and Driveway Apron and Depressions

**Check off work to be completed and submit with permit application**

*Final Inspections must be scheduled 24 hours prior to puring concrete.*  
*Weekend pours are NOT permitted.*  
*Concrete pours shall take place between 9:30am and 11:30 unless otherwise approved by Township.*  
*No staging or storing of construction materials in the the street is permitted without approval.*  
*All streets are to be kept clean of all cosntruction debris.*  
*Lighted barricades, reflective cones and caution tape are required around all work areas.*  
*\*Please reference Detailed Concrete Specifications and Curb, Sidewalk, Apon details.*

**Closed Permit Requirements**


PA One Calls are required before construction begins for Excavation 12" or more.  
 Concrete to be used is PA DOT Class A (3,500 psi).  
 Copies of material tickets are to be supplied to the inspector.  
 Final inspection after all work is completed.

**Curb Work**


Best quality steel or wood forms are to be used.  
 Control Joints are to be placed every 10 feet.  
 Curb shall be dowl pinned into inlets. Two #6 rebars centered vertically.  
 Depression Curb shall have Two #6 rebars placed at midpoint of depressed curb per specs.  
 6 Inches to 2 foot saw cut minimum in roadway to allow for compaction.  
 Backfill: 6" compacted 2A modified stone, 4" of 19mm base course, 2" 9.5mm superpave wearing course.  
 3/4" Expansion material to be placed every 50 feet full depth. It shall be placed bewteen the depressed curb and the apron.

**Sidewalk Work**


4 inches 2B clean stone to be placed and compacted under sidewalk with a vibrator compacter.  
 4 inches of sidewalk is required.  
 1/2" Expansion material to be palced every 30 feet and transitions from 4" to 6" (driveway apron).  
 1/2" Expansion material to be placed where existing pavement or sidewalk meets proposed sidewalk.  
 1/8" wide x 1" deep transverse dummy joint placed every 4 to 5 feet to match what currently exists.  
 Non-slip surface texture shall be broomed transverse to the slope of the sidewalk.

**Apron Work**


6 inches of 2B clean stone to be placed under apron and apron sidewalk and compacted with vibrator.  
 6 inches of PennDOT Class "A" (3,500 psi) concrete is required at  
 1 layer of WWF 6x6 W2xW2 to be placed in the apron and apron sidewalk


Contractor Name: \_\_\_\_\_ Date: \_\_\_\_\_

Signature: \_\_\_\_\_


Site Address: \_\_\_\_\_

**At final Inspection:**

Township Sign Off: \_\_\_\_\_ Date: \_\_\_\_\_

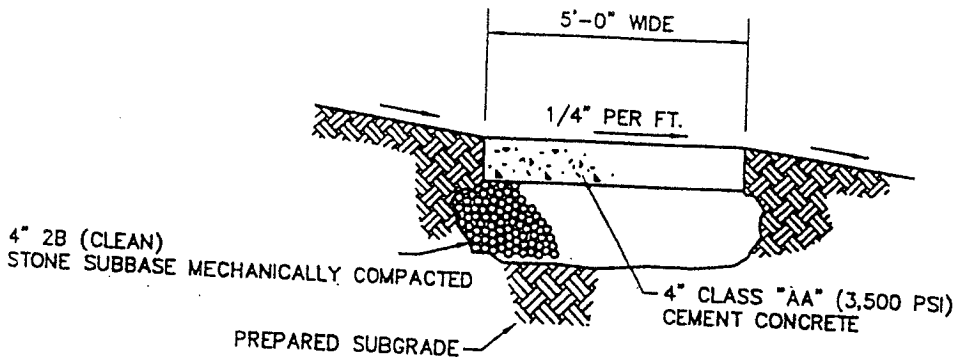

SECTION

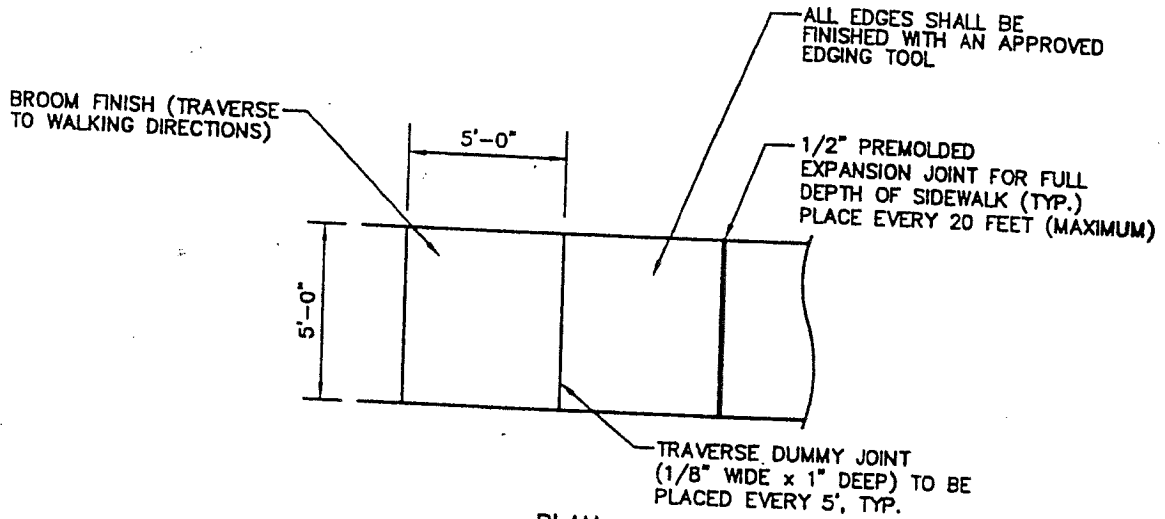

PLAN

NOTE: WITH ALL PROPOSED SIDEWALK, A NON-SLIP SURFACE TEXTURE SHALL BE BROOMED TRAVERSE TO THE SLOPE OF THE SIDE WALK.

03J706RC



CARROLL ENGINEERING CORPORATION  
 949 EASTON ROAD  
 SUITE 100  
 WARRINGTON, PA 18976

**CONCRETE SIDEWALK**

SCALE	DATE	DRAWING NO.	LATEST REVISION DATE
N.T.S.	5/20/02	10 OF 15	